

A




B

C

D

- 397 -

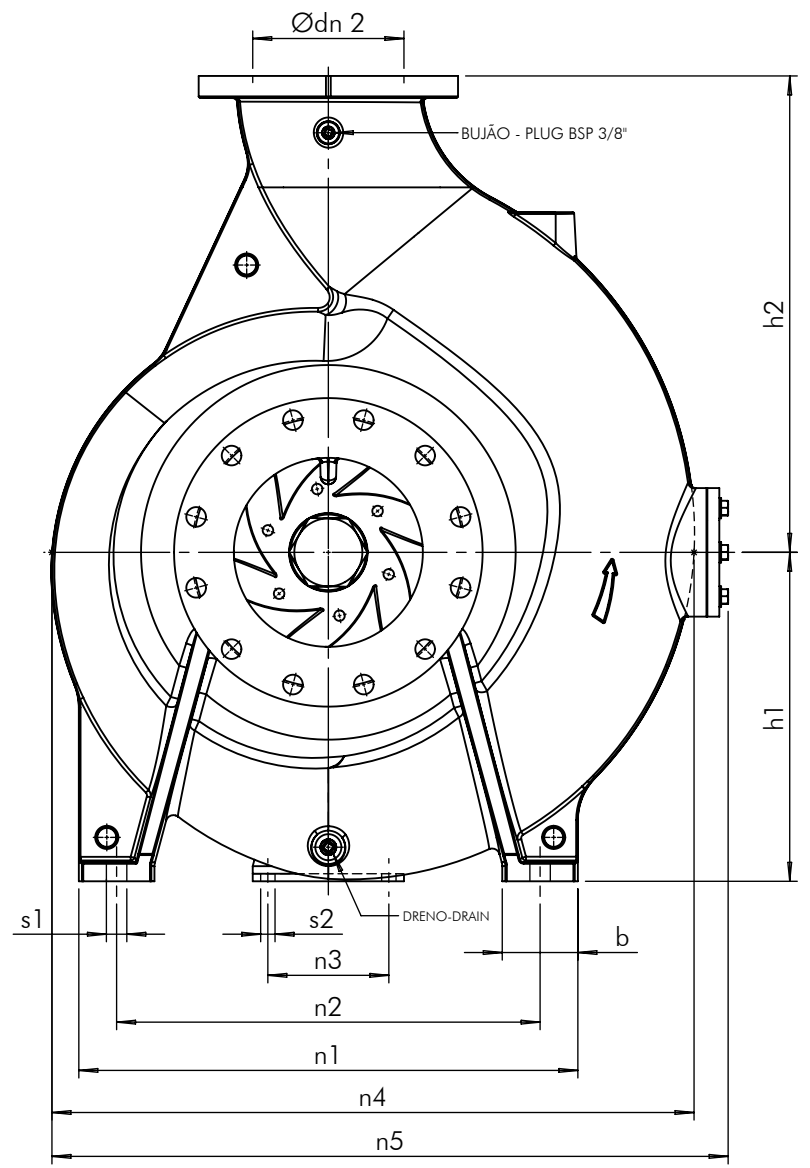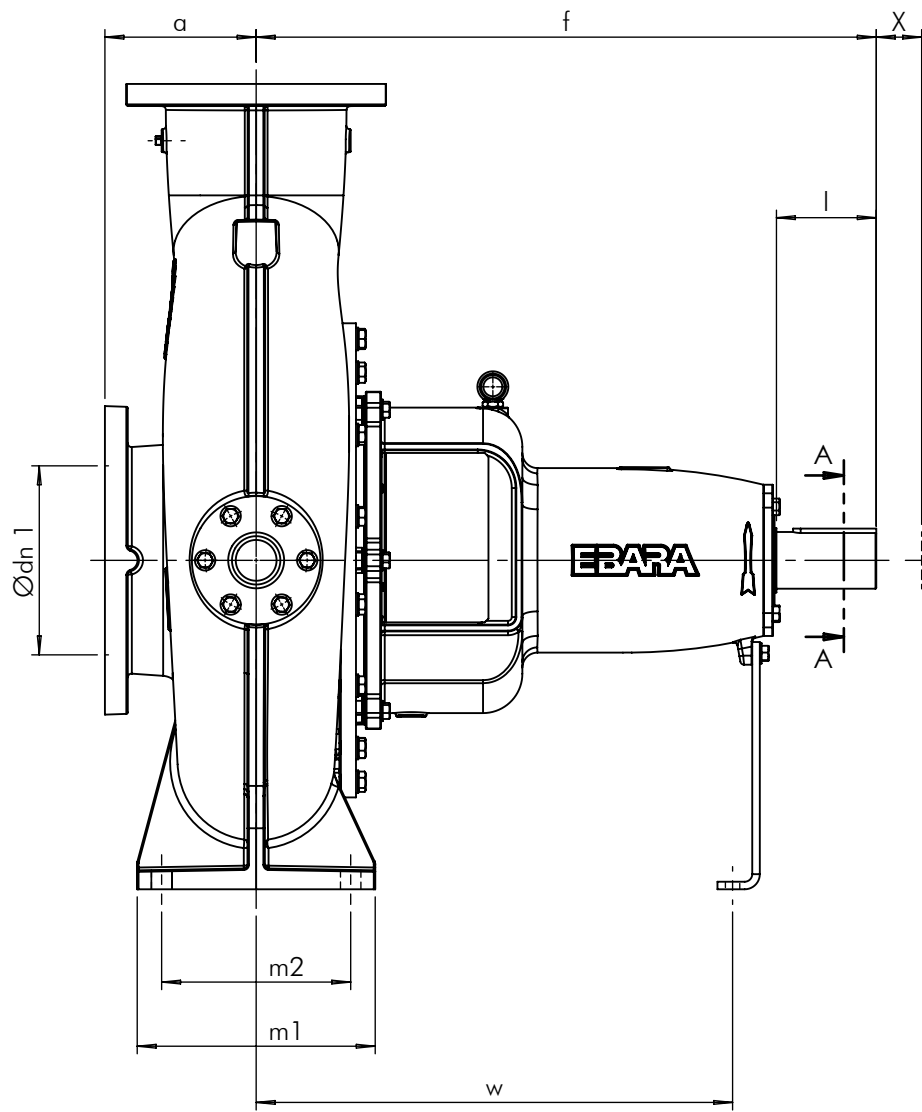

DIMENSÃO	CLASSE
0,5 - 3	4 ±
3 - 6	- - -
6 - 30	0,5
30 - 120	1,0
120 - 400	1,5
400 - 1000	2,5
1000 - 2000	4,0
2000 - 4000	6,0
4000 - 8000	8,0



A

B

C

 BOMBAS HIDRÁULICAS EBARA CORPORATION	EXECUTADO	Wiliam C.	25/04/18			---	AE-22.03.02	26/04/22	Gustavo	
	VERIFICADO	Watanabe	25/04/18			08	---	---	23/11/21	Gustavo
	APROVADO	Watanabe	25/04/18			07	---	---	20/04/21	Gustavo
		NOME	DATA CRIAÇÃO			OBSERVAÇÃO	REVISÃO	LOCAL	Nº DOCUM.	DATA

Bombas série GS e GS ^B					DESENHO Nº 144GS4			
Em caso de dúvidas pergunte!					MATERIAL : Ferro F.		PESO:	
					FOLHA 1 de 2		UNID.: Milímetros (mm)	

Dimensões da Bomba e Eixo - Dimensions of Bare Shaft Pump																																																
F	Diâmetro Nominal Nominal Diameter		Bomba - Pump					Suporte - Support										Eixo - Shaft						Massa - Mass (Kg)																								
	dn1	dn2	a	f	h1	h2	Dreno-Drain	b	m1	m2	n1	n2	n3	n4	n5	w	s1	s2	d	l	t	u1	u2	X	GS																							
32-125.1	50	32	80	360	112	140	BSP 1/4"	50	100	70	190	140	110	238	---	260	15	17	24	50	27	8	7	100	28																							
32-125					238	---					28																																					
32-160.1					250	---					29																																					
32-160					250	---					29																																					
32-200					294	---					39																																					
32-200.1			276	---	39																																											
32-250			340	---	46																																											
40-125	65	40	80	360	112	140	BSP 1/4"	50	100	70	210	160	110	243	---	260	15	17	24	50	27	8	7	100	30																							
40-160			132		160	240					190	260		---	31																																	
40-200			100		160	180					265	212		305	---										41																							
40-250					180	225					320	250		345	---										48																							
40-315					225	250					345	280		415	---										82																							
50-125	65	50	100	360	132	160					BSP 1/4"	50		100	70										240	190	110	266	---	260	15	17	24	50	27	8	7	100	33									
50-160					160	180																			265	212		305	---										33									
50-200					180	200	320	250	355	---			44																																			
50-250					180	225	320	250	355	---			50																																			
50-315					225	280	345	280	425	---			86																																			
65-125			80	65	100	360	160	180	BSP 1/4"	65			125			95	280	212	110	279	---	260	15	17	24	50		27	8										7	100	37							
65-160							200	225									320	250		377	---																				41							
65-200	200	250					360	280			386	---		73																																		
65-250	225	280					400	315			429	---		90																																		
65-315	125	470					80	160			120	430		315	340		19	32		80	35						10			8	140	90																
80-160	100	80	125	360	180	225	BSP 1/4"	65			125	95		320	250		110	348		---	260	15	17				24			50	27	8	7	100	46													
80-200	100	80	125	470	180	250	BSP 1/4"	65			125	95		345	280		110	367		---	340	15	17				32			80	35	10	8	140	67													
80-250					200	280			403	---			77																																			
80-315					250	315			463	---			101																																			
80-315L					530	280			435	355			560	---	370	19		42	110	45				12	8	140		112																				
80-400																												162																				
100-160	125	100	125	470	200	250			BSP 3/8"	80			160	120	360	280		110	368	---	340	19		17	32	80		35	10					8	140	91												
100-200					140	225									280	400			315	414																---	370	24	42	110	45	12	8	140	103			
100-250							470	250			315	442					---						108																									
100-250L							530	280			355	560					---						120																									
100-315					315	355	500	400			522	---			176																																	
100-315L			315	355	500	400	522	---			218																																					
100-400			530	280	355	500	400	522			---	218																																				
125-200	150	125	140	470	250	BSP 3/8"	80	160	120	400	315	110	446	---	340	19	17	32	80	35	10	8	140	120																								
125-250					530					280	355		500	400										522	---	370	24	42	110	45	12	8	140	131														
125-250L																																		484	---	148												
125-315																																		522	---	176												
125-400					522					---	218																																					
125-500			522	---	218																																											
150-200			200	150	160					470	280		355	BSP 3/8"	100	200							150	500	400	110	523	---	340	19	17	32	80	35	10	8	140	154										
150-250	200	150	160	530	280	375	BSP 3/8"	100	200	150	500	400	110	550	---	370	24	17	42	110	45	12	8	140	171																							
150-315					670	315					400	550		450	140										---	670	500	19	48	51,5	14	9	180	225														
150-400																																		315	450	550	450	140	---	670	500	19	48	51,5	14	9	180	339
150-400L																																		315	450	550	450	140	---	670	500	19	48	51,5	14	9	180	363
150-500					180	670					375	560		BSP 1/2"	100										315	250	660	560	140	---	765	500	24	19	60	110	64	18	11	180	491							
200-400	250	200	180	670	385	560					BSP 1/2"	100		315	250	660	560							140	---	875	500	24	19	60	110	64	18	11	180	508												
200-500			200	820	435	630																														160	---	895	630	27	75	125	79,5	20	12	645		

thebe

BOMBAS HIDRÁULICAS

EBARA CORPORATION

EXECUTADO

Wiliam C.

25/04/18

VERIFICADO

Watanabe

25/04/18

APROVADO

Watanabe

25/04/18

REVISÃO

LOCAL

Nº DOCUM.

DATA

APROVADO

Bombas série GS e GS^B

DESENHO Nº 144GS4

ESCALA: 1:15

Em caso de dúvidas pergunte!

MATERIAL : Ferro F.

PESO:

FOLHA 2 de 2

UNID.: Milímetro (mm)